


A2 CABLE GLAND

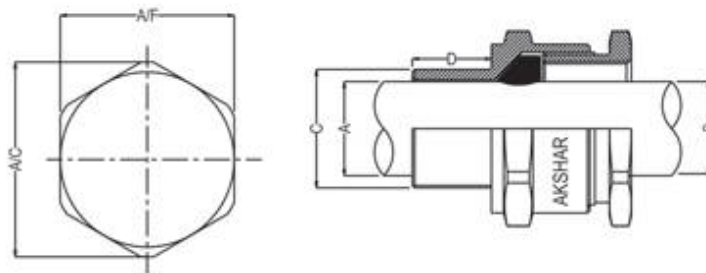


Size:	20 mm to 90 mm & 3/4" to 3 1/2 "
Standard:	BS 6121 - 1 - 2005
Application:	For Indoor or outdoor use with all types of SWA extruded Bending Cable
Function:	Providing seal on outer sheaths of the unarmoured cable
Ingress:	IP66
Protection Material:	Brass BS 2874
Thread:	BSP & NPT
Operating Temp.:	-20 ⁰ C to + 80 ⁰ C
Cable Type:	Unarmoured
Accessories:	Shroud, Earth Tag & Washer, Lock Nut

Gland Size	Thread Size "C"		Thread Length "D"	Cable Dimension		A/F	A/C
	Metric	Inch		A	B		
A2-20 S	20	3/4"	10	10.80	8.00	23.00	25.50
A2-20 L	20	3/4"	10	14.70	11.00	25.00	27.30
A2-25 S	25	1"	10	16.00	12.00	31.00	34.00
A2-25 L	25	1"	10	20.30	13.00	34.30	38.50
A2-32 S	32	1 1/4 "	10	26.20	19.00	41.50	46.50
A2-32 L	32	1 1/4 "	10	26.20	19.00	41.50	46.50
A2-40 S	40	1 1/2 "	15	29.00	23.00	45.00	50.00
A2-40 L	40	1 1/2 "	15	34.00	26.00	49.00	54.00
A2-50 S	50	2"	15	41.00	32.00	58.00	65.00
A2-50 L	50	2"	15	45.00	36.00	62.30	69.50
A2-63 S	63	2 1/2 "	15	50.80	43.00	70.00	78.00
A2-63 L	63	2 1/2 "	15	56.50	48.00	76.30	85.00
A2-75 S	75	3"	15	62.00	55.00	85.00	95.00
A2-75 L	75	3"	15	68.50	61.00	90.00	99.00
A2-90 S	90	3 1/2 "	20	80.00	67.00	100.00	111.50
A2-90 L	90	3 1/2 "	20	90.00	86.00	103.00	115.00

All Dimensions are in mm

BW2 PART TYPE CABLE GLAND

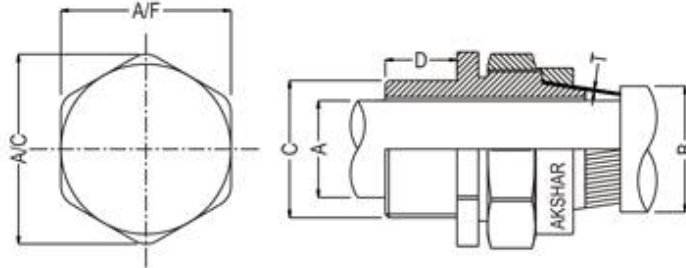


Size:	20 mm to 90 mm & 3/4" to 3 1/2 "
Standard:	BS 6121 - 1 - 2005
Application:	Dry Indoor, For use with all types of SWA extruded Bending Cable
Function:	Providing mechanical cable retention & electrical continuity via armoured wire termination
Ingress:	IP2X EN 60529
Protection Material:	Brass BS 2874
Thread:	BSP & NPT
Operating Temp.:	-80 ⁰ C to + 300 ⁰ C
Cable Type:	SWA Extruded Bending Cable
Accessories:	Shroud & Earth Tag, Lock Nut

Gland Size	Thread Size "C"		Thread Length "D"	Cable Dimension			A/F	A/C
	Metric	Inch		A	B	Armoured Wire Diameter "T"		
BW-20 S	20	3/4"	10	13.00	15.50	0.9-1.25	22.00	24.40
BW-20 L	20	3/4"	10	14.00	18.50	0.9-1.25	23.85	27.30
BW-25 L	25	1"	10	20.50	26.00	1.25-1.60	34.00	37.50
BW-32 L	32	1 3/4 "	10	27.00	33.90	1.60-2.00	40.60	45.60
BW-40 L	40	1 1/2 "	15	33.00	41.50	1.60-2.00	52.30	58.50
BW-50 S	50	2"	15	38.50	47.00	2.00-2.50	55.50	63.50
BW-50 L	50	2"	15	44.00	52.00	2.00-2.50	64.70	72.50
BW-63 S	63	2 1/2 "	15	51.00	59.20	2.50	73.75	83.00
BW-63 L	63	2 1/2 "	15	56.80	65.50	2.50	78.50	87.75
BW-75 S	75	3"	15	63.00	74.00	2.50	90.00	100.00
BW-75 L	75	3"	15	68.50	79.50	2.50-3.15	95.00	105.00

All Dimensions are in mm

CW4 PART TYPE CABLE GLAND

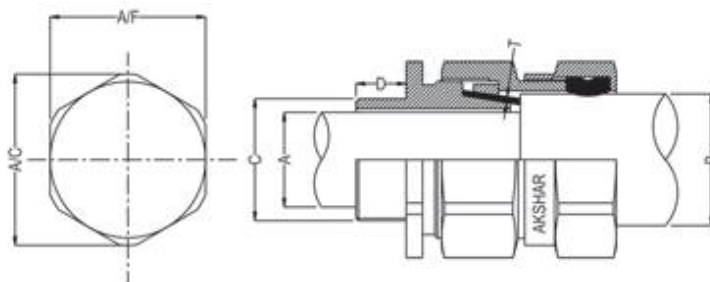


Size:	20 mm to 90 mm & 3/4" to 3 1/2"
Standard:	BS 6121 - 1 - 2005
Application:	For Indoor or outdoor use with all types of SWA extruded Bending Cable
Function:	Providing environmental seal on both the cable inner & outer sheaths. Also provides mechanical cable retention & electrical continuity via armoured wire termination
Ingress:	IP66
Protection Material:	Brass BS 2874
Thread:	BSP & NPT
Operating Temp.:	-20 ⁰ C to + 80 ⁰ C
Cable Type:	SWA Extruded Bending Cable
Accessories:	Shroud, Earth Tag, Washer, Lock Nut

Gland Size	Thread Size "C"		Thread Length "D"	Cable Dimension			A/F	A/C
	Metric	Inch		A	B	Armoured Wire Diameter "T"		
CW-20 S	20	3/4"	10	11.80	17.80	0.9-1.25	24.00	27.00
CW-20 L	20	3/4"	10	14.00	20.80	0.9-1.25	27.70	31.00
CW-25 S	25	1"	10	18.00	24.00	1.2-1.60	31.50	35.00
CW-25 L	25	1"	10	20.30	27.40	1.2-1.60	35.00	39.00
CW-32 S	32	1 1/4 "	10	24.50	31.00	1.60-2.00	43.00	47.50
CW-32 L	32	1 1/4 "	10	26.50	34.20	1.60-2.00	43.00	47.50
CW-40 S	40	1 1/2 "	13	30.40	38.50	1.60-2.00	51.50	57.00
CW-40 L	40	1 1/2 "	13	33.20	41.00	1.60-2.00	51.50	57.00
CW-50 S	50	2"	13	40.00	47.00	2.00-2.50	58.50	65.00
CW-50 L	50	2"	13	44.00	53.50	2.00-2.50	66.00	73.00
CW-63 S	63	2 1/2 "	14	50.00	59.00	2.50	72.00	80.00
CW-63 L	63	2 1/2 "	13.50	56.00	66.00	2.50	80.00	89.00
CW-75 S	75	3"	15	62.00	72.00	2.50	86.50	97.00
CW-75 L	75	3"	15	69.00	79.00	2.50	94.00	105.00
CW-90 S	90	3 1/2 "	20	76.00	86.00	2.50-3.15	106.00	118.00
CW-90 L	90	3 1/2 "	20	79.00	90.00	2.50-3.15	106.00	118.00

All Dimensions are in mm

E1W TYPE CABLE GLAND

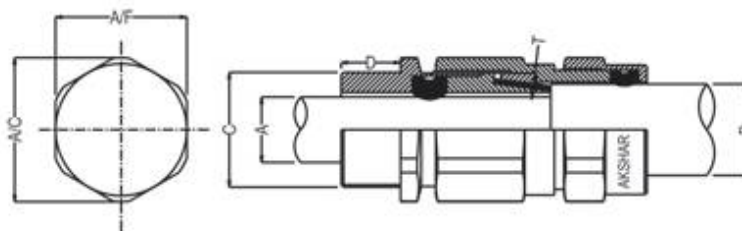

Size:	20 mm to 90 mm & 3/4" to 3 1/2"
Standard:	en 50262: 1999
Application:	For Indoor or outdoor use with all types of SWA extruded Bending Cable
Function:	Providing environmental seal on both the Cable Inner & Outer Sheaths. Also provides mechanical retention & electrical continuity via armoured wire termination
Ingress:	IP66
Protection Material:	Brass BS 2874
Thread:	BSP & NPT
Operating Temp.:	-20 ⁰ C to + 80 ⁰ C
Cable Type:	SWA extruded bending cable
Accessories:	Shroud, Earth Tag & Washer, Lock Nut

Gland Size	Thread Size "C"		Thread Length "D"	Cable Dimension			A/F	A/C
	Metric	Inch		A	B	Armoured Wire Diameter "T"		
E1W-20 S	20	3/4"	10	12.50	17.00	0.90-1.25	24.00	28.50
E1W-20 L	20	3/4"	10	14.40	20.50	0.90-1.25	27.00	31.30
E1W-25 S	25	1"	10	17.80	23.80	1.25-1.60	31.00	34.00
E1W-25 L	25	1"	10	20.40	27.00	1.25-1.60	34.30	38.50
E1W-32 S	32	1 1/4 "	10	26.50	33.00	1.60-2.00	41.50	46.50
E1W-32 L	32	1 1/4 "	10	26.50	33.00	1.60-2.00	41.50	46.50
E1W-40 S	40	1 1/2 "	15	31.00	37.00	1.60-2.00	45.00	50.00
E1W-40 L	40	1 1/2 "	15	32.50	40.80	1.60-2.00	49.00	54.00
E1W-50 S	50	2"	15	37.80	48.00	2.00-2.50	58.00	65.00
E1W-50L	50	2"	15	44.00	53.50	2.00-2.50	62.30	69.50
E1W-63 S	63	2 1/2 "	15	50.50	56.50	2.00-2.50	70.00	78.00
E1W-63 L	63	2 1/2 "	15	56.50	65.50	2.00-2.50	76.30	85.00
E1W-75 S	75	3"	15	62.50	72.00	2.50-3.20	85.00	95.00
E1W-75 L	75	3"	15	67.50	78.50	2.50-3.20	90.00	99.00
E1W-90	90	3 1/2 "	20	80.00	94.00	2.50-3.20	112.00	125.00

All Dimensions are in mm