

A220S- A2 INDUSTRIAL GLAND PACKS BRASS CW614N
Description:

IEC62444:2010

Function: Providing seal on outer sheaths of all types of unarmoured cable in indoor and outdoor area.

Ingress Protection: IP66

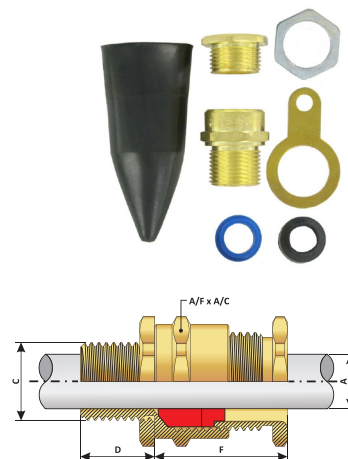
Thread: Metric, NPT

Operating Temp: -60°C to +125°C

Cable Type: Unarmoured Cable

Features: Outer Displacement Seal

Seal Material: LSOH Silicone Seal & LSOH Nylon Washer


OTHER ADDITIONAL INFORMATION

Size	Standard Thread Size C"		Optional Thread		Thread Length "D"	Cable Dia. A		Protrusion Length "F"	A/F	A/C
	Metric	NPT	Metric	NPT		Min	Max			
20s16	20	1/2"	25	3/4"	10.00	3.10	8.60	25.75	24.00	26.20
20S	20	1/2"	25	3/4"	10.00	6.10	11.70	25.75	24.00	26.20
20	20	1/2"	25	3/4"	10.00	6.50	13.90	26.25	27.00	29.50
25	25	3/4"	32	1"	10.00	11.30	19.90	34.00	36.00	39.20
32	32	1"	40	1 1/4"	10.00	17.00	26.20	35.00	41.00	45.00
40	40	1 1/4"	50	1 1/2"	15.00	23.60	32.10	35.00	49.00	53.00
50S	50	1 1/2"	63	2"	15.00	31.50	38.20	33.00	54.50	60.00
50	50	2"	63	2 1/2"	15.00	35.80	44.00	37.00	60.00	65.00
63S	63	2"	75	2 1/2"	15.00	41.70	50.00	34.25	67.50	72.00
63	63	2 1/2"	75	3"	15.00	47.50	56.00	37.25	75.00	80.00
75S	75	2 1/2"	90	3"	15.00	55.00	62.00	40.75	80.00	85.00
75	75	3"	90	3 1/2"	15.00	62.00	68.00	44.00	84.00	90.00
90	90	3 1/2"	100	4"	18.00	67.00	79.00	51.50	106.00	114.00
100	100	4"	-	-	20.00	77.00	91.00	56.00	122.00	130.00
110	110	-	-	-	20.00	86.00	100.00	54.50	138.00	146.00
115	115	-	-	-	20.00	86.00	102.00	54.50	138.00	146.00