

BW CABLE GLAND- CABLE GLAND


Description:

Size: 20mm to 90mm

Standard: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010

Function: Provides mechanical cable retention & electrical continuity via armoured wire termination in indoor area. It is easy to install.

Ingress Protection: IP2X

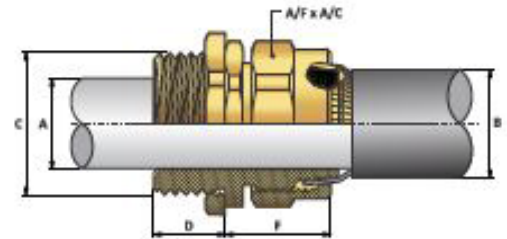

Material: Brass CW614N

Thread: Metric

Operating Temp: -60°C to +200°C

Cable Type: Single Wire Armour (SWA) Cable

Features: Two Part Armour Lock

Accessories: PVC Shroud, Earth Tag, Galvanized Steel Lock Nut



OTHER ADDITIONAL INFORMATION

Gland Selection Chart								
Size	Standard Thread Size "C"	Thread Length "D"	Cable Dia.	Cable Dia.	Armour Wire Dia.	Protrusion Length "F"	A/F	A/C
	Metric		"A" Max.	"B" Max.				
20S	20	10.00	12.50	16.00	0.9-1.25	15.70	24.00	26.20
20	20	10.00	15.00	20.00	1.25-1.60	17.20	24.00	26.20
25	25	10.00	20.50	27.50	1.60-2.00	25.20	32.00	35.00
32	32	10.00	27.25	34.50	1.60-2.00	21.50	40.50	45.00
40	40	15.00	33.30	41.50	2.0-2.50	23.20	48.00	52.00
50S	50	15.00	38.50	47.00	2.0-2.50	26.80	55.00	60.00
50	50	15.00	44.50	52.00	2.50	27.20	61.00	65.00
63S	63	15.00	51.00	59.20	2.50	27.50	70.00	75.00
63	63	15.00	56.80	65.50	2.50	28.50	75.00	80.00
75S	75	15.00	64.00	74.00	2.5-3.15	29.40	85.00	90.00
75	75	15.00	68.20	79.50	3.15	30.00	90.00	95.00
82	82	15.00	74.70	84.40	3.15	40.20	96.50	103.00
90	90	15.00	82.80	91.00	3.15	40.00	109.00	118.00

Product Code for Ordering Purpose					
Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	BW2P	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Nickel Plated- 3		Dip Moulding Shroud-DS	IP Washer-6
				LSF Shroud-LS	