

C240-16/32 - INDUSTRIAL PLUG COUPLERS**Description:**

Rated current: 16A/32A

Rated voltage: 220-250V

No. of poles: 2P+E (3P) (2P+T) (Three Poles) (3 Pole)
(3 Pin) (Three Pins)

Protection degree: IP44


Housing material: Flame Retardant PA6 RoHS Reach

Standards: IEC60309-1, IEC60309-2

Certificates: S, CB, CE, TUV, ISO9001:2008, RoHS, REACH

**OTHER ADDITIONAL INFORMATION**

Specification	1) Rated current: 16A/32A
	2) Rated Voltage: 220-250V~
	3) No. of poles: 2P+E (3P)
	4) Operation Temperature: -25°C ~ +40°C
Protection Class	IP44
Main Material	Housing Material: PA6 RoHS; Contact: nickel-plated brass RoHS
Certificates	S, CB, CE, TUV, ISO9001: 2008, RoHS, REACH
Colour	Blue
Package	Polybag + 10pcs/Inner Box + 100pcs/Export carton

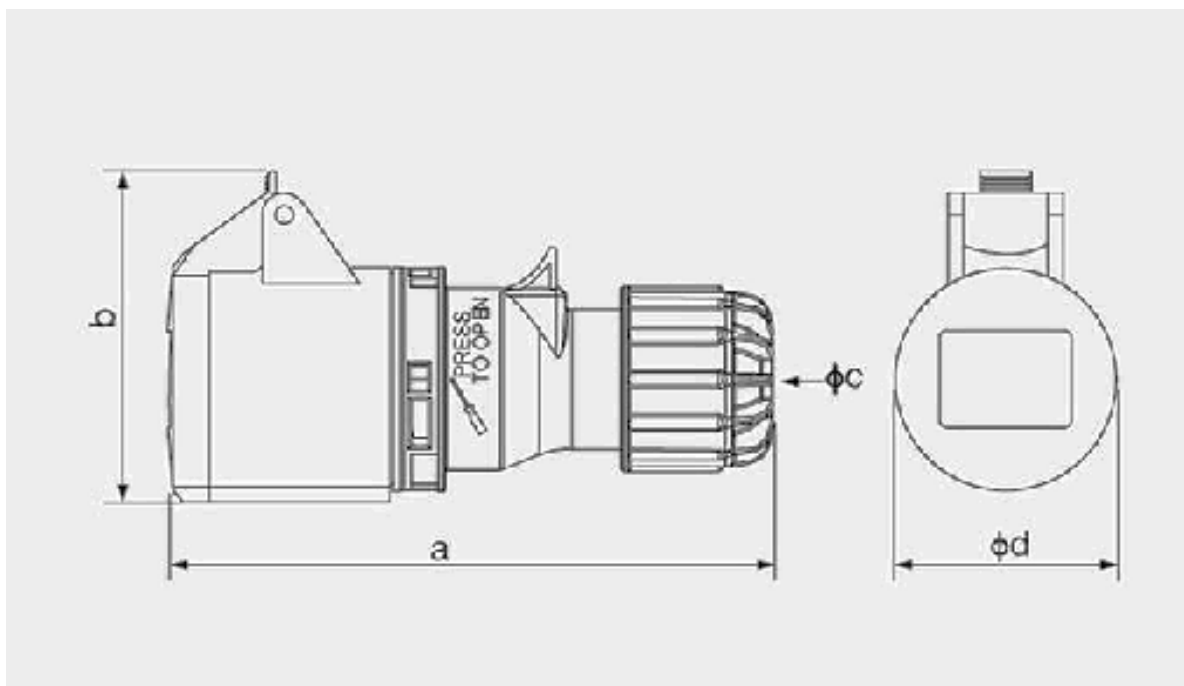

Current	16A			32A		
Pole	3	4	5	3	4	5
a	130	135	142	162	162	163.5
b	75.6	83	89.5	94	94	100
c	15	15	17	22	22	22
d	52	58	62.8	64.6	64.6	71
Cable Size (mm ²)	1~2.5			2.5~6		