

Hang About!

Essential Wire Suspension Systems & Accessories

• Catenary Wire & Accessories *Stainless Steel*

Code	Type	Price
ICWSS30	30 Metre Stainless Steel Wire	£13.75
ICWSS50	50 Metre Stainless Steel Wire	£22.66
ICWSS100	100 Metre Stainless Steel Wire	£48.46
ICWSSE	Eyelet For Catenary Wire	£0.23
ICWSSG	Wire Rope Grip	£0.24
ICWSSH	Hook Plate For Catenary Wire	£2.76
ICWSSR	Ring Plate For Catenary Wire	£2.53
ICWSSS	4'' Strainer (Tensioner)	£2.40

Our range of Catenary Wire & Accessories, excluding the Carabiner Hook (ICWC), now in Stainless Steel.

Material: Stainless Steel A2 (304)



• Catenary Wire & Accessories *Galv Steel*

Code	Type	Price
ICW30	30 Metre Galvanised Steel Wire	£5.94
ICW50	50 Metre Galvanised Steel Wire	£10.26
ICW100	100 Metre Galvanised Steel Wire	£19.98
ICWC	Carabiner Hook	£0.84
ICWE	Eyelet For Catenary Wire	£0.16
ICWG	Wire Rope Grip	£0.17
ICWH	Hook Plate For Catenary Wire	£1.73
ICWR	Ring Plate For Catenary Wire	£1.73
ICWS	4'' Strainer (Tensioner)	£1.73

Our range of Catenary Wire & Accessories

Material: Galvanised Steel



• Jack Chain *Pre-Galv BZP*

Code	Size	Price Each
JACK	10m	£3.40

Standard: Single Link DIN9021 Large Diameter

Steel: No 10. (3mm Thick)

Max Work Load: 7.5Kg

Finish: Pre Galv

Packed: 10m Boxes



• Eye Bolts *BZP*

Code	Size	Price 100
ISEB6	M6 x 80	£16.56
ISEB8	M8 x 80	£23.70
ISEB10	M10 x 80	£29.94

Steel: Grade 4.6 (Mild)

Finish: Zinc & Clear



• Catenary Wire kits *Stainless Steel*

Code	Type	Price
ICWSSKIT	Stainless Steel Catenary Wire Kits	£32.00

Stainless Steel Catenary Wire Kits

Material: Stainless Steel A2 (304)

IN STOCK NOW



• Wedge Drop-In Anchor ZY


Code	Size	Length (b)	Price 100
IASM6	M6	25mm	£5.11
IASM8	M8	30mm	£6.39
IASM10	M10	40mm	£8.81
IASM12	M12	50mm	£12.14

Material: Steel

Usage: Medium duty internal thread

Application: Ideal for suspension of cable tray, ductwork

Substrate Applicable: Concrete-Limited suitability in stone and solid brickwork



• Lipped Drop-In Anchor BZP


Code	Size	Length (b)	Price 100
LDA6	M6	25mm	£6.26
LDA8	M8	30mm	£8.61
LDA10	M10	40mm	£10.86

Material: Steel

Usage: Medium duty internal thread, fit flush to wall

Application: Ideal for suspension of cable tray, ductwork

Substrate Applicable: Concrete-Limited suitability in stone and solid brickwork.



• Polyester Anchor Resin 300ml

Code	Size	Price Each
SRES	300ml	£4.75

Usage: Concrete, Stone, Perforated Bricks and Cavity Blocks in a wide range of applications.

For instructions of use and other technical data, please ask for our Specification Sheet.



• Wire Hanger ZY

Code	Size	Length (b)	Price 1000
IWH660	M6 x 60	60mm	£70.30

Material: Steel

Usage: Medium duty installation, expansion type

Application: Suspended ceilings, catenary/suspension wire

Substrate Applicable: Concrete, Stone and solid brickwork.



• Light Hanger (Witches Hat) BZP

Code	Erico Caddy	B-Line	Britclips	Box Quantity	Price 100
MP1	DFF1	BH17	HSC1	50	£30.24



• Ceiling Clip BZP

Code	Stud Size	Erico Caddy	B-Line	Britclips	Box Qty	Price 100
T2516	M6 x 16	4G16M16	BMA41616	AC25	50	£60.59



Cable Blocker/Gripper

Function:


Recommended for the suspension of HVAC, electrical and mechanical services (For indoor & stationary setting).

Applications:

Suitable for locking wire rope to insure desired safe working loads.

Technical Data:

- SMANCA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

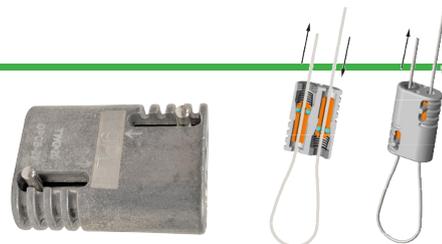

Code	Description	Price
ICWLG3	2.4mm - 3.2mm	£1.69

Looped Anchor with Gripper

Wire Rope crimped masonry anchor.

Function:

Recommended for suspension of HVAC, Electrical and Mechanical services (For indoor setting)

Applications:

Concrete ceilings and cracked concrete ceilings

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.


Material Specification

MS-En1A with White Zinc

Max Load 280kg

SWL 56Kg

Safety Factor 5:1



ICWSA3
ICWSA5

Code	Description	Price
ICWSA3	7 x 7 Strand 2mm (3 metres)	£2.69
ICWSA5	7 x 7 Strand 2mm (5 metres)	£3.08

Snaphook with Gripper

Wire Rope crimped with snaphook.

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Suitable for use on cable trays etc.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification

Hook MS-En8D White Zinc

Wire rope MS Galvanized IS228, (ASTM-D117)

-2016, IS-6745-2011 Hexagonal

Max Load 280kg

SWL 56Kg

Safety Factor 5:1



ICWSH3
ICWSH5

Code	Description	Price
ICWSH3	7 x 7 Strand 2mm (3 metres)	£2.65
ICWSH5	7 x 7 Strand 2mm (5 metres)	£2.89

Toggle with Gripper

Wire Rope crimped with end stopper & toggle

Function:

Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:

Suitable for profile roof cladding, light fittings, luminaries and other cavities.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification

Toggle MS White Zinc

End Stopper Ms Zn Trivalent

Wire rope Ms Zn Trivalent IS228, (ASTM-D117)

-2016 IS-6745-2011

Max Load 280kg

SWL 56Kg

Safety Factor 5:1



ICWST3
ICWST5

Code	Description	Price
ICWST3	7 x 7 Strand 2mm (3 metres)	£2.49
ICWST5	7 x 7 Strand 2mm (5 metres)	£2.86

Stud with Gripper

Wire Rope crimped with M8 stud Comes complete with drop-in anchor.

Function:
Recommended for the suspension of HVAC, electrical and mechanical services.
(For indoor & stationary setting).

Applications:
Concrete ceilings, metal decking and pressed metal brackets (with nuts).

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- Tested & Certified by TUV Nord.
- As per UL 1598, CSA C22.2 No.250.0-08

Material Specification


Stud MS-En1A White Zinc
MS Galvanized IS228, (ASTM-D117)
-2016, IS-6745-2011

Wire Rope 280kg
56Kg

Max Load 280kg
SWL 56Kg
Safety Factor 5:1

Also compatible with Wedge Nuts and Channel Nuts

ICWSS3
ICWSS5

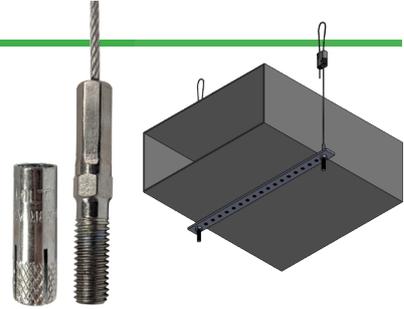

Code	Description	Price
ICWSS3	7 x 7 Strand 2mm (3 metres)	£2.96
ICWSS5	7 x 7 Strand 2mm (5 metres)	£3.20

Loop Wire with Gripper

Wire Rope crimped with pre-formed loop.

Function:
Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:
Purlins, beams, roof trusses and other accessible building features.

Technical Data:

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.


Material Specification

Ferrule MS-En8D White Zinc (Hexagonal Crimped)

Wire rope Ms Galvanized IS228, (ASTM-D117)-2016, IS-6745-2011

Max Load 280kg
SWL 56Kg
Safety Factor 5:1

ICWSL3
ICWSL5



Code	Description	Price
ICWSL3	7 x 7 Strand 2mm (3 metres)	£1.99
ICWSL5	7 x 7 Strand 2mm (5 metres)	£2.22

Snap Hook 'Y' with Gripper

Wire Rope crimped Snap Hooks.

Function:
Recommended for the suspension of HVAC, electrical and mechanical services.

Applications:
Suitable for use on cable trays etc.

Technical Data:

- SMANCA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

Material Specification:


Hook MS-En8D White Zinc

Wire Rope MS Galvanized IS228, (ASTM-D117)-2016, IS-6745-2011

Crimping Hexagonal

Max Load 280kg
SWL 56Kg
Safety Factor 5:1

ICWSY3
ICWSY5

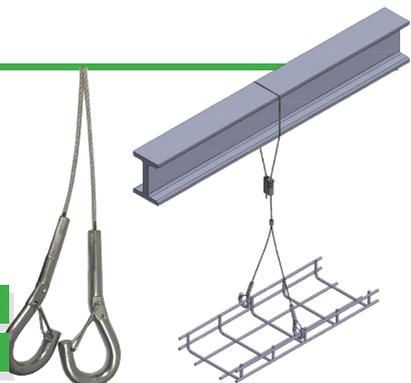

Code	Description	Price
ICWSY3	7 x 7 Strand 2mm (3 metres)	£3.22
ICWSY5	7 x 7 Strand 2mm (5 metres)	£3.75

HangTyte™
Wire Suspension System